

# Intel® Select Solutions for Nutanix



## The Challenge

Evaluating every available solution takes time and resources. Customers need tested, pre-validated technology they can deploy and execute with confidence.

## Overview + Benefits

Intel® Select Solutions are predefined, workload-optimized solutions designed to simplify and accelerate infrastructure evaluation and deployment. These solutions have been tested and optimized to meet or exceed minimum performance levels. Intel® Select Solutions are available from multiple server platform manufacturers and can support a wide variety of workloads, ranging from the data center to the edge.

Use Cases:



Artificial Intelligence



Analytics



Hybrid/  
Multi-Cloud



Network/Edge



Database



VDI/DaaS

## Value Props



ISV Certified



OEM Validated



Intel Verified




Workload Optimized





Latest Intel® Technologies

## Real-World Hybrid and Multi-Cloud Use Case

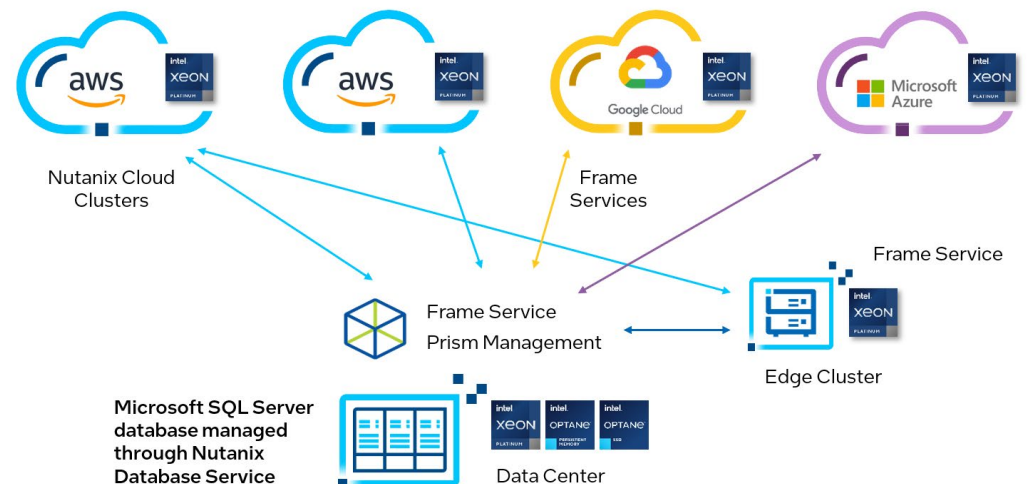

# Proof Points

Popular Workloads on Nutanix Can Improve Performance and Reduce Latency Gen-over-Gen<sup>1</sup>

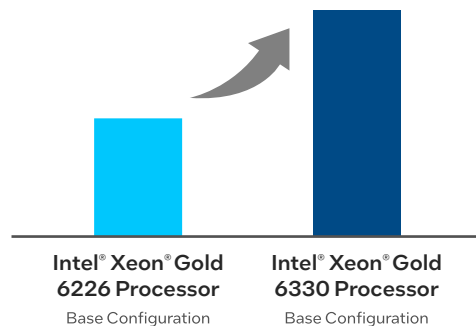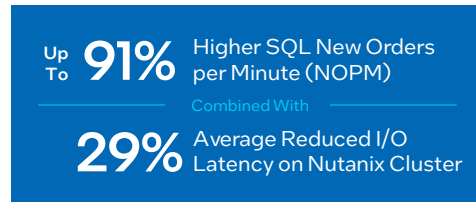

- Benchmarked 2nd Gen versus 3rd Gen Intel Xeon Scalable processors with Nutanix AOS
- Tested multiple configurations, measuring I/O performance and Microsoft SQL operations
- Realized strong performance improvements with latest gen hardware and software
- Saw incremental performance improvements by adding higher frequency Intel Xeon Scalable CPUs, Intel Optane persistent memory, and Intel Optane SSDs, especially paired with Advanced NVMe Tiering for Optane in AOS 6.1
- Take advantage of this reference design - Nutanix OEMs can deliver the configs tested

We've spent months testing, so you don't have to!

# Nutanix + Intel Select Solutions Highlights

- **Tailor Platform Deployments** for each workload with varying amounts of compute, storage, or memory as needed.
- **Optimize** using Intel Optane SSDs with Advanced NVMe Tiering in Nutanix AOS.
- **Run New or More Workloads** on HCI and build the foundation for a hybrid cloud with workload-optimized and cloud-ready infrastructure.
- **Simplify Management** by consolidating workloads onto fewer high-performance servers and extending to the cloud through the same management plane.
- **Transparently Expand Memory** for memory-intensive workloads like VDI and Databases with Intel Optane PMem.
- **Provide Flexible and Scalable I/O Virtualization** with Intel Virtualization Technology (Intel VT). Intel Ethernet 700 Series delivers outstanding I/O performance in virtualized server environments.
- **Provide Intelligent and Dynamic Data Management:**
  - Data Locality: Place data on the same HCI node as the application.
  - Data Resiliency: Replicate data across multiple nodes in the system for resiliency in case of failures.

1. Tests by Intel as of January 2022.

CLX BASE: Intel Xeon Gold 6226 Processor: 4 Nodes, 2x Intel Xeon Gold 6226 CPU at 2.70 GHz (12 cores/24 threads, 125 W) or higher number SKU, 1x Intel Server Board S2600WFO, Total Memory: 384 GB (12x32 GB 2933 MHz DDR4 DIMM), HyperThreading: Enable, Turbo: Enable, uCode: 0x500002c, Storage (Boot Drive) Intel DC S4510 240GB M.2, Storage (Meta Data Tier) Intel DC P4510 2 TB 2.5" PCIe, Storage (Capacity Tier) Intel DC D3-P4510 1.92 TB 2.5" PCIe, Data Network: 2x25 GbE Intel XXV710-DA2, Windows Server 2019 (v 1809) Nutanix 5.18.06 STS (NCC 3.10.1, LCM 2.4), Microsoft SQL Server 2019 15.0.2000.5, HammerDB 3.3, using 7 instances of SQL, with 1000 warehouses and 100 users. Average Nutanix storage cluster IO latency measured during SQL benchmark test. Performance results are based on Intel internal testing as of January 2022.

ICX BASE: Intel Xeon Gold 6330 Processor: 4 Nodes, 2x Intel Xeon Gold 6330 CPU at 2.00 GHz (28 cores/56 threads, 205 W) or higher number SKU, 1x Intel Server Board M50CYP2UR, Total Memory: 512 GB (16x32 GB 2933 MHz DDR4 DIMM), HyperThreading: Enable, Turbo: Enable, uCode: 0xd000280, Storage (Boot Drive) Intel DC S4510 240GB M.2, Storage (Meta Data Tier) Intel DC P4510 2 TB 2.5" PCIe, Storage (Capacity Tier) Intel DC D3-P4510 1.92 TB 2.5" PCIe, Data Network: 2x25 GbE Intel XXV710-DA2, Windows Server 2019 (v 1809) Nutanix 5.18.06 STS (NCC 3.10.1, LCM 2.4), Microsoft SQL Server 2019 15.0.2000.5, HammerDB 3.3, using 7 instances of SQL, with 1000 warehouses and 100 users. Average Nutanix storage cluster IO latency measured during SQL benchmark test. Performance results are based on Intel internal testing as of January 2022.



## Want More Information?

Contact your Nutanix or Intel representative to learn how we can help you transform your infrastructure for hybrid cloud.

### Where to buy

<https://www.nutanix.com/partners/oem>

### Resources

<https://www.nutanix.com/intel>

Performance varies by use, configuration, and other factors. Learn more at [www.intel.com/PerformanceIndex](https://www.intel.com/PerformanceIndex).

Performance results are based on testing as of dates shown in configurations and may not reflect all publicly available updates. See backup for configuration details. No product or component can be absolutely secure.

Intel contributes to the development of benchmarks by participating in, sponsoring, and/or contributing technical support to various benchmarking groups, including the BenchmarkXPRT Development Community administered by Principled Technologies.

Your costs and results may vary.

Intel technologies may require enabled hardware, software, or service activation. Some results may have been estimated or simulated.

Intel does not control or audit third-party data. You should consult other sources to evaluate accuracy.

All product plans and roadmaps are subject to change without notice.

© Intel Corporation. Intel, the Intel logo, and other Intel marks are trademarks of Intel Corporation or its subsidiaries. Other names and brands may be claimed as the property of others.